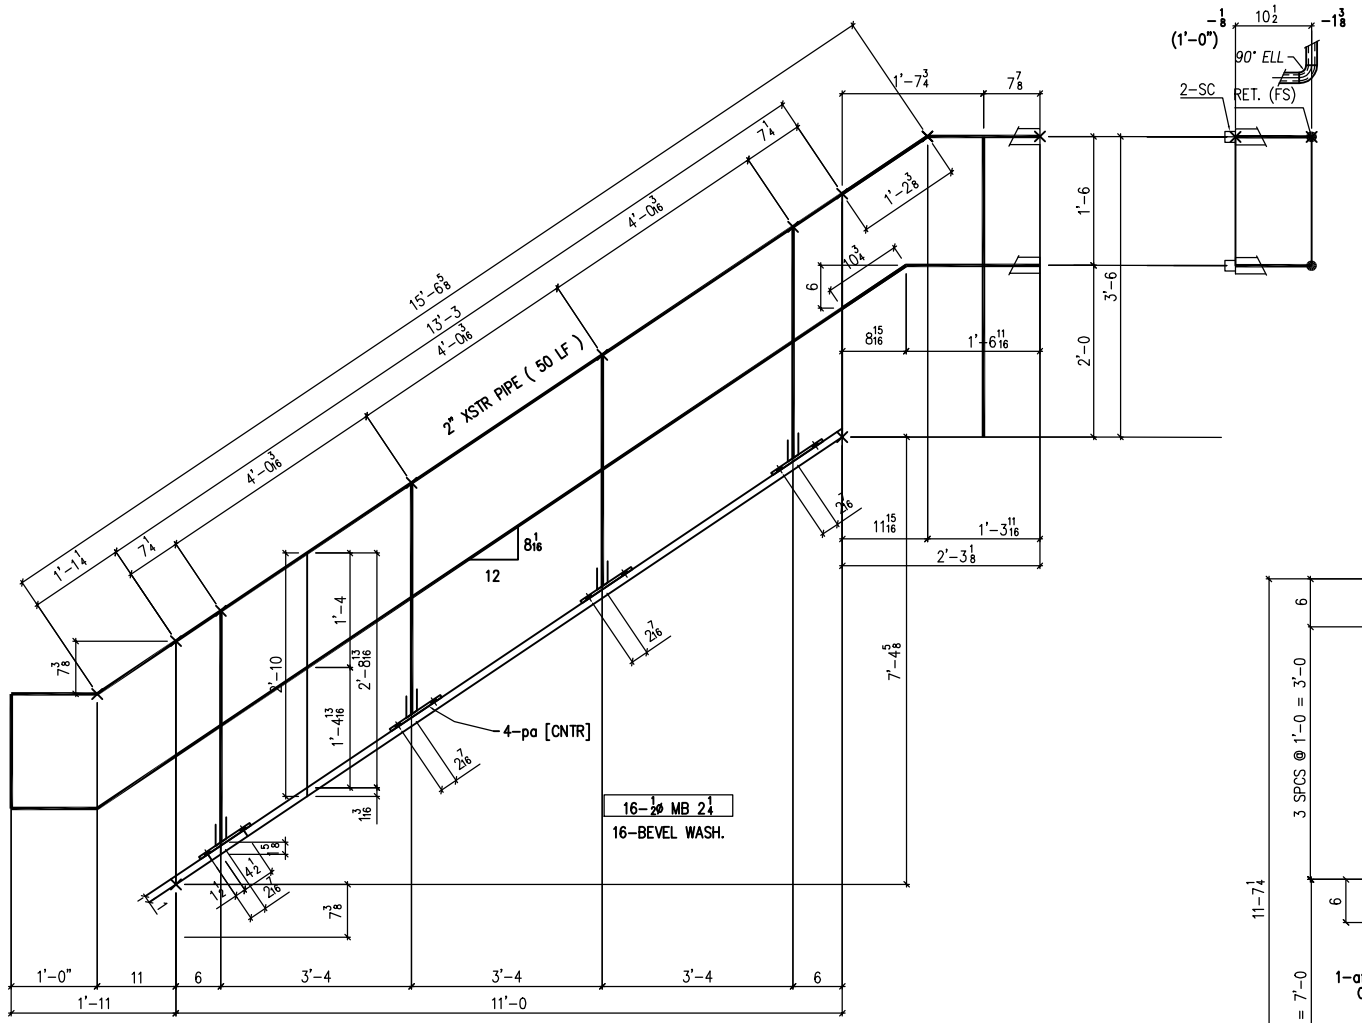

ONE~ Stair Rail ~ R5R ONE~ Stair Rail ~ R5L

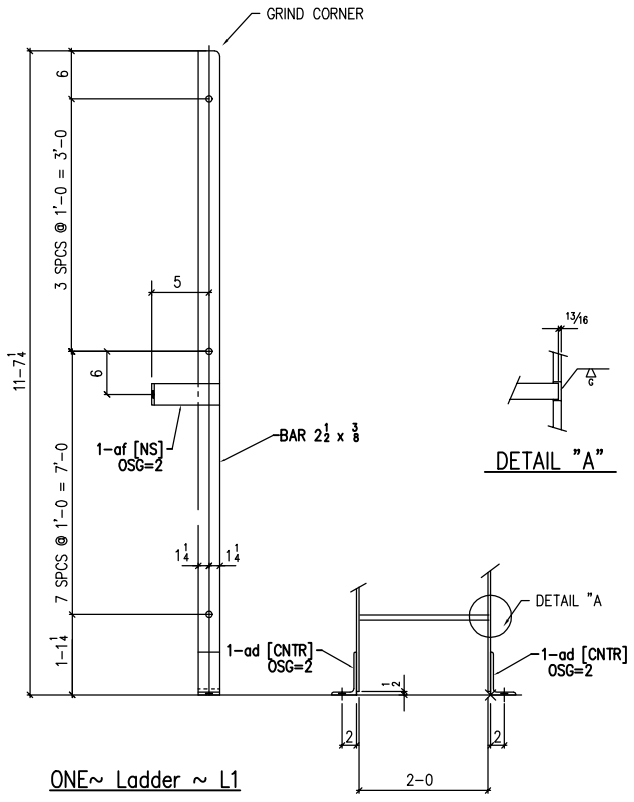

ONE~ Ladder ~ L1

2-3/4ø E.B. 4 1/4 ONE~ Stringer ~ S1R ONE~ Stringer ~ S1L 48-3/8ø MB 1 1/4

STUB DIMS FOR TREADS		
TREAD NO.	1ST HOLE	2ND HOLE
1	5 3/4	11 5/16
2	1'-7	2'-0 13/16
3	2'-8 1/4	3'-2 1/16
4	3'-9 1/2	4'-3 5/16
5	4'-10 3/4	5'-4 9/16
6	6'-0	6'-5 13/16
7	7'-1 1/4	7'-7 1/16
8	8'-2 1/2	8'-8 5/16
9	9'-3 3/4	9'-9 9/16
10	10'-5	10'-10 13/16
11	11'-6 1/4	12'-0 1/16
12	12'-7 1/2	13'-1 5/16

SEQ	SHIPPING BILL		BILL OF MATERIAL					
ONE	SR1R		Stringer				Right	
ONE	SR1L		Stringer				Left	
ONE			2" XSTR PIPE	50	0		Lin Feet	251.00
ONE			2" XSTR PIPE	50	0		Lin Feet	251.00
		8	PL 3/8 x 2	0	9	pa		15.31
			TOTAL WEIGHT					517.31
ONE	S1R		Stringer				Right	
ONE	S1L		Stringer				Left	
		2	C12x20.7	13	10 7/8			575.72
		2	C12x20.7	2	10 13/16			120.10
		2	L 3 x 3 x 1/4	0	3	aa		2.45
		2	L 3 x 3 x 1/4	0	3	ab		2.45
		2	L 2 x 2 x 3/16	2	0	ac		9.66
			TOTAL WEIGHT					710.38
ONE	L1		Ladder					
		2	PL 3/8 x 2	11	7 1/4			59.23
		11	ROD 1ø	2	0 1/2	ma	Rungs	60.02
		2	L 4 x 3 x 1/4	0	2 1/2	ad		2.40
		2	L 6 x 4 x 5/16	0	3	af	Grind CNR Round	5.16
			TOTAL WEIGHT					131.97

TOTAL BOLTS
2-3/4ø E.B. 4 1/4
48-3/8ø MB 1 1/4
16-1/2ø MB 2 1/4

Licensed SSDCP User

PRINTS			
APPROVAL			
SHOP			
FIELD			

PRIMER:	Red Oxide
STEEL:	A36 UNO
HOLES:	13/16
WELDS:	E70xx
AUTOMATICALLY Detailed by SSDCP	

RAMSAY STEEL

CONTRACTOR: Bush Contractors
ENG / ARCH: Michael Jordan, PE

SCALE	REVISIONS	BY	DATE
DATE			
DRWN GP CHKD			
APP'D			

PROJECT: SSDCP Chemicals
Platform 17G addition

JOB NO. 03-116
DWG NO. Stair Sht 1

PDF created with FinePrint pdfFactory trial version http://www.fineprint.com